

## (1) Gain setting

H : High frequency  
L : Low frequency

\*The number shows the present set value of gain.

AF : Fishing mode

AC : Cruising mode

## (2) Range mode

R:M : Manual

R:A : Auto range

R:AS : Auto shift

## (3) Power Voltage

## (4) Alarm Set Status

Water temp alarm  
XTE alarm

## (5) Status of [F1]/[F2] key assignment

Image speed  
Interference rejection  
Color rejection  
Noise reduction  
Shift


## (6) Status of [EVENT] key assignment

Zoom range  
Zoom start  
A scope  
White line  
Background color

## (7) Time mark


Store position  
Store image

## Select the setting of preset function ([F1] key / [F2] key)

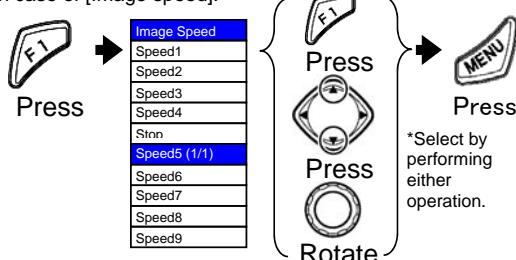
The function differs depending on the [F1]/[F2] key setting.  
In case of [Image speed]:

\*By continuously pressing the [F1]/[F2] key, a function assigned to each key can be selected.


## Select the range ([▲ RANGE▼] key)

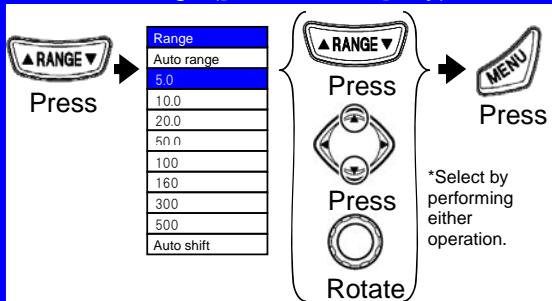


## Select the display menu ([DISP] key)

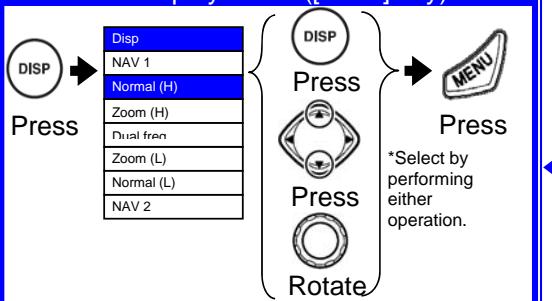


## Power on/Power off ([BRILL] key)

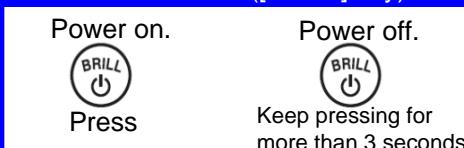

## Adjust the brilliance ([BRILL] key)

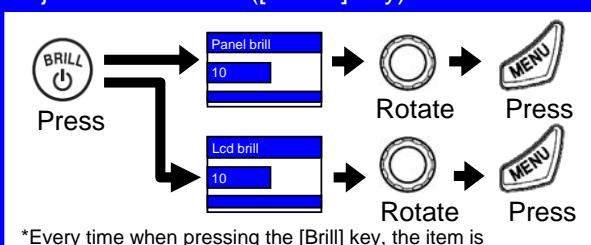


\*Every time when pressing the [Brill] key, the item is alternately displayed.

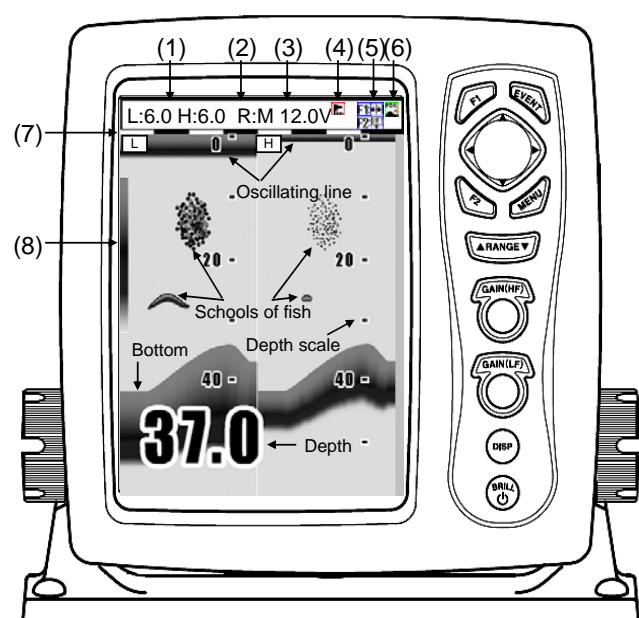


## Preset the destination / Preset the image ([EVENT] key)

Depending on the [EVENT key set], the function differs.


In case of [Store pos]:




In case of [Store image]:

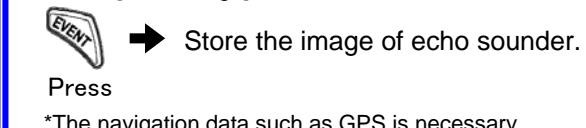

## Display the menu ([MENU] key)

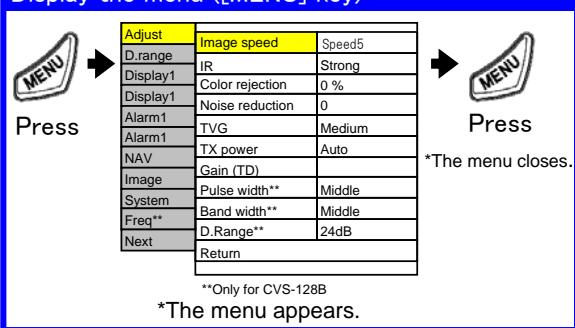


## Gain adjust / Gain select ([Knob] key)

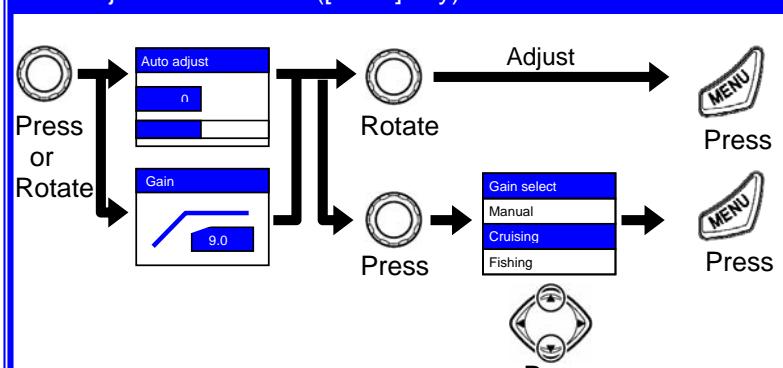

\*[GAIN (HF) Knob] key can adjust high frequency.

\*[GAIN (LF) Knob] key can adjust low frequency.

## ●How to operate the menu

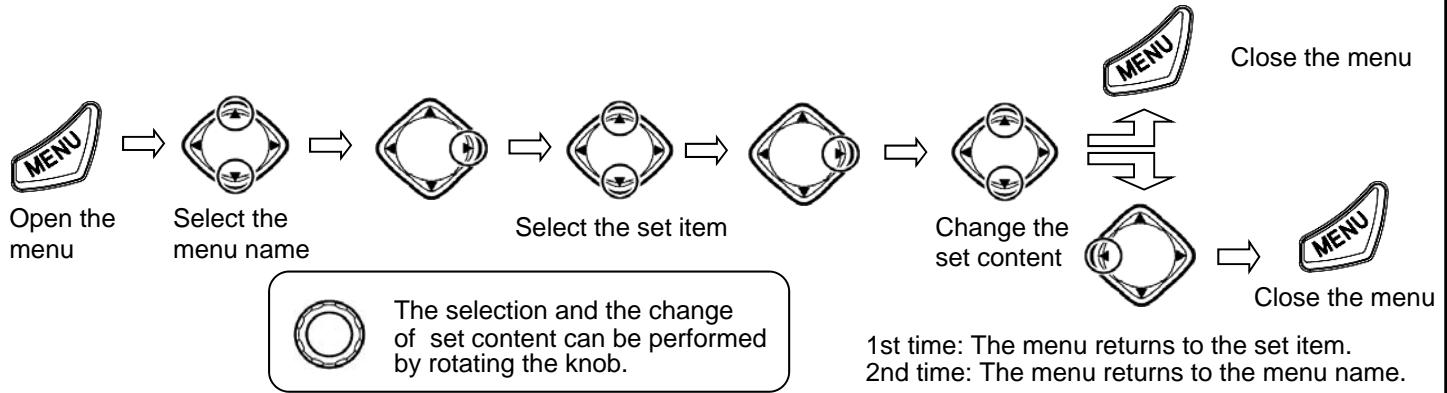

## ●Function of Adjust Set Menu

Adjoust	Image speed	Speed5 (1)
D.range	IR	Strong (2)
Display1	Color rejection	0% (3)
Display2	Noise reduction	0 (4)
Alarm1	TVG	Medium (5)
Alarm2	TX power	Auto (6)
NAV	Gain(TD)	(7)
Image	Pulse width*	Middle
System	Band width*	Middle
Freq*	D.Range*	24dB
Next	Return	

\*Only for CVS-128B




You can make numerical value bigger at the time of lack of sensitivity.

## ●Function of display range set menu

Adjust	Shift step	1m	(1)
D.range	Zoom type	BTM.	(2)
Display1	Zoom range	10.0m	(3)
Display2	Zoom start	0m	(4)
Alarm1	Disp width	Center	(5)
Alarm2	Range preset		(6)
NAV	Return		
Image			
System			
Freq*			
Next			

\*Only for CVS-128B

- (1) It sets the quantity of movement of shift.
  - (2) It selects the kind of the zoom type.
  - (3) It sets the range of image selected in (2).
  - (4) It sets the zoom starting position of image set in (2).
  - (5) It selects the disp width.
  - (6) It presets the range.

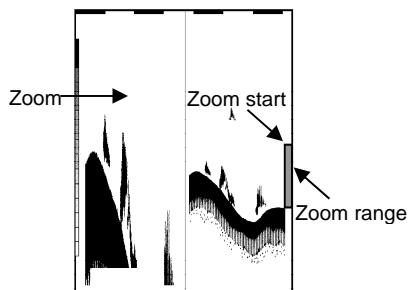

## ● Preset of Range

Registration of the range can be easily changed with following operation. Preset the set value suitable for your purpose.

